



FB-600


A printer for all reasons!

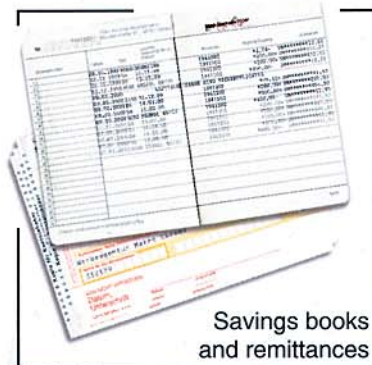

Savings books
and remittances

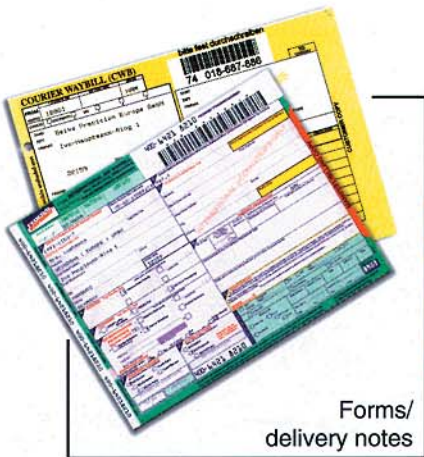

Forms/
delivery notes

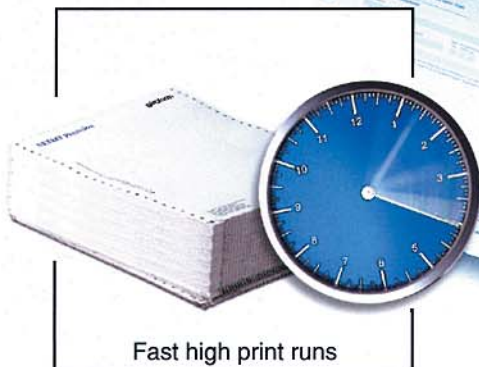

Fast high print runs



**Economical to use
and reasonable price**

A flat-bed needle printer with exceptional speed

- A mid-range, high-speed printer
- Secure and reliable paper handling
- Prints on a wide variety of media
- Max. thickness: 2 mm
- Completely user friendly


SEIKO Precision

Specifications

One of the stars in its class

The FB-600 from SEIKO Precision is a economical flat-bed needle printer for printing various media of differing thickness. For this purpose, it has an automatic paper thickness sensor for materials of up to 2 mm thickness. The flexible paper feed is complemented by a likewise

automatic paper alignment system for precise results. Its high printing speed means that the FB-600 can be employed on the most varied of business applications, such as savings books or various sets of forms. Handling specialized types of media as easy as A4 paper.

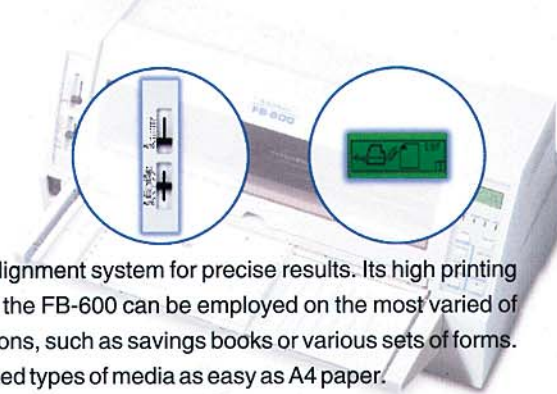

Print method	24-pin dot matrix impact, bidirectional (text and graphics)		
Print speed	600 cps / 15 cpi (SSD), 400 cps / pica (draft), 300 cps / HQDR (pica), 150 cps / LQ (pica)		
Emulations	EPSON® ESC/P, IBM® 2391		
Print buffer	64 KB		
Line feed speed	6 lines/second		
Resident fonts	Roman, Sans-serif, Courier, Prestige, Script, Gothic, OCR-A, OCR-B, Orator and Orator-S		
Character Sets	EPSON® character set, Code Page 437, 850, 857, 858, 860, 861, 863, 865, 772, 774, 851, 852, 853, 855, 864, 866, 869, Bulgaria, Estonia, Hungarian, IBM, Russian, Lithuanian KBL, Mazowia, MJK, USSR Gost, 437 Greek, 866 Latvian, 866 Ukrainian, 1252, 1250, ISO-8859-2, 3, 4, 5, 7, 9, 10, 15, ISO 1, BRASCII, ABICOMP		
Barcodes	2/5 Industrial, 2/5 Interleaved, 2/5 Matrix, Codabar, Code 11, Code 39, Code 93, Code 128, EAN-8, EAN-13, UPC-E, POSTNET		
Paper thickness	Auto gap adjustment, maximum. 2.0 mm		
Multipart form	Original + 6 duplicates (copy mode), original + 4 duplicates (normal mode)		
Operating panel	Graphic LCD, paper path lever, gap adjust lever, 8 key, 4 LED		
Printing ribbon	Special cassette-type black fabric ribbon, ribbon life: 15 million characters (draft mode)		
Interfaces	Parallel and RS-232C, automatic I/F selection function		
Printing head life	300 million characters		
Power supply	AC 230 V		
Power consumption	Operation: 170 W, standby: 40 W		
Dimensions	635 (W) x 465 (D) x 294 (H) mm		
Weight	Approx. 22 kg		
Paper feed	Push tractor or friction		
Paper paths			
Continuous paper front feed - Front push tractor* Paper width: 203,2 - 381 mm * Removable tractor unit can be used front and rear.	Continuous paper rear feed - Rear push tractor* Paper width: 203,2 - 381 mm	Single sheet manual feed - Front manual insertion, front or rear ejection is selectable Paper width: 182 - 430 mm	Single sheet auto feed - Cut sheet feeder (option) Paper width: 182 - 430 mm
Detection function	Paper jam, paper skew, paper width		

SEIKO Precision

Dealer's stamp:

SEIKO Precision (Europe) GmbH
Hermann-Buck-Weg 9
D-22309 Hamburg
Telephone: + 49 (0) 40 / 64 58 92 - 0
Telefax: + 49 (0) 40 / 64 58 92 - 28/30
E-mail: export@seiko-precision.de
Website: http://www.seiko-precision.com